


Server Processes ready

Resource lifecycle for client-managed resource identifiers. Not really, the identifiers are coming to the client via links in the representation from the server.

Server Process /ready/index#p

Are the /ready/ processes subordinate resources of /rsg/?

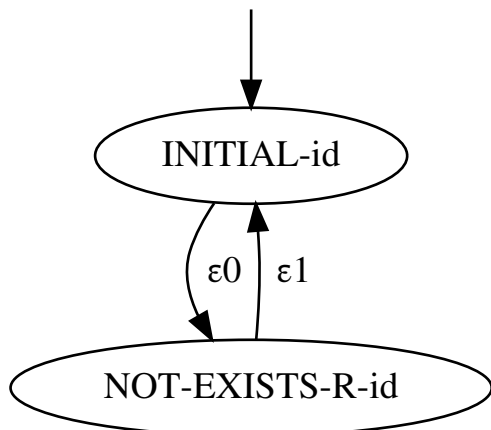


- $\epsilon 0$ CREATE-POST-rsg-index-201
- $\epsilon 1$ RPC-rsg-index-200

Server Process /ready/{id}#p

The process involves only one URI template and is thus atomic.

- Input: id via URI template
- Output: -

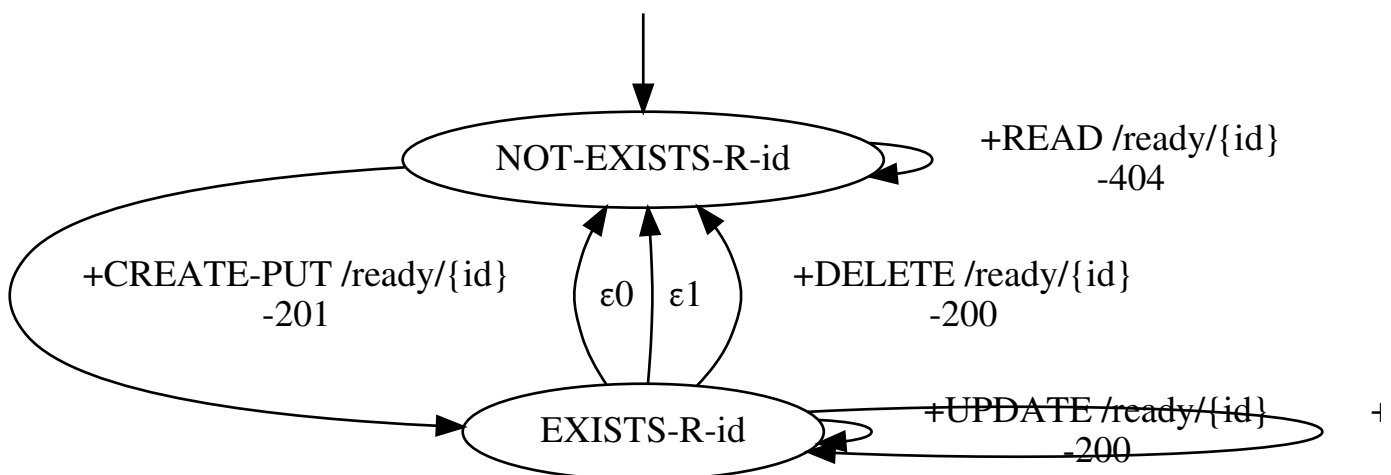

- $\epsilon 0$ DELETE-rsg-id-410
- $\epsilon 1$ RPC-rsg-index-200